

CCBC-10

## CCBC-10 COCONUT BASED CARBON BLOCK CARTRIDGE

- Nominal 1-micron rating\*
- Water-washed coconut-carbon formulation\*
- Premium high capacity bad taste & odor and chlorine taste & odor reduction\*
- Enhanced dirt holding capacity\*

CCBC-10 cartridges are highly effective at reducing unwanted taste & odor and chlorine taste & odor from potable drinking water. With a nominal 1-micron rating, they are equally effective at reducing fine sediment.\*

CCBC-10 cartridges are manufactured using a patented process and is made from a water-washed, coconut-carbon formulation. This process and media yields a cartridge with high chlorine taste & odor reduction capacity.

These cartridges are protected by Endurawrap™, a uniquely formulated polyolefin bilaminate pre-filter, designed to significantly

increase the useful life of the cartridge by trapping sediment that typically plugs carbon block cartridges.

They are an ideal choice for a wide range of residential, food service, commercial and industrial applications. They also make excellent polishing filters or pre-filters in applications requiring fine filtration and high capacity.

\* Based on manufacturer's internal testing.





**PENTEK**  
FILTRATION

Pure Quality.™

# CCBC-10

## Coconut Based Carbon Block Cartridge

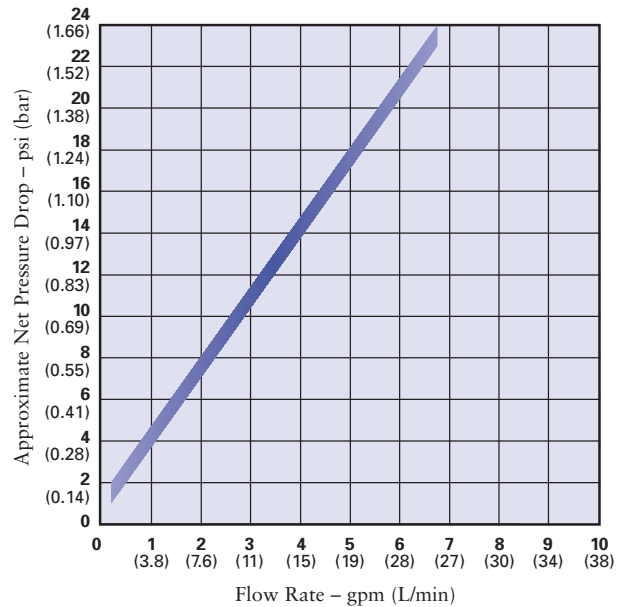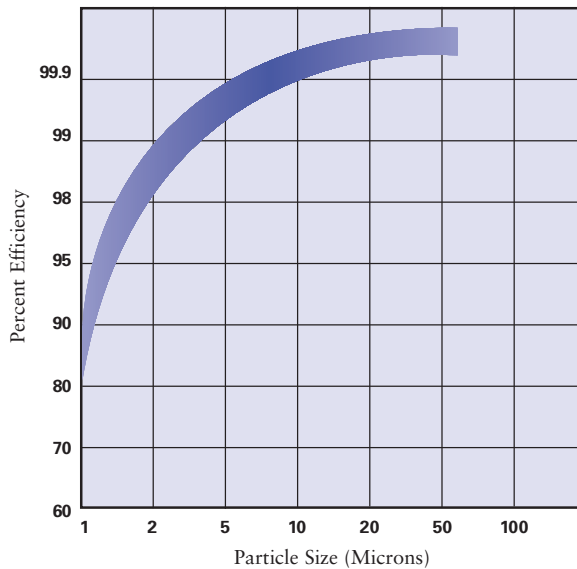

This CCBC-10 is Tested and Certified by NSF International to NSF/ANSI Standard 42 for material requirements only.

### Cartridge Specifications and Performance Data

Model	Maximum Dimensions	Micron Rating (Nominal)*	Initial ΔP (psi) @ Flow Rate (gpm)*	Chlorine Taste & Odor Reduction @ Flow Rate (gpm)*†
CCBC-10	2-7/8" x 9-3/4" (73 mm x 248 mm)	1	3.3 psi @ 1 gpm (0.23 bar @ 3.8 lpm)	>20,000 gallons @ 1 gpm (75,700 liters @ 3.8 L/min)

\* Based on manufacturer's internal testing.

### Materials of Construction

- |                     |                                      |                      |                                  |
|---------------------|--------------------------------------|----------------------|----------------------------------|
| • Filter Media      | Water-Washed<br>Coconut Based Carbon | • Netting            | Polyethylene                     |
| • End Caps          | Polypropylene                        | • Gaskets            | Buna-N                           |
| • Inner/Outer Wraps | Polyolefin                           | • Temperature Rating | 40°F to 180°F (4.4° C to 82.2°C) |

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

U.S. Patent No. 5,976,432 & 5,823,668



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047  
 Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com  
 International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com

